


Food & Dairy Beverage Grade Nitrile Hose
Ideal for Suction & Discharge Applications



Food & Dairy Beverage Grade Nitrile Hose for Suction & Discharge Applications

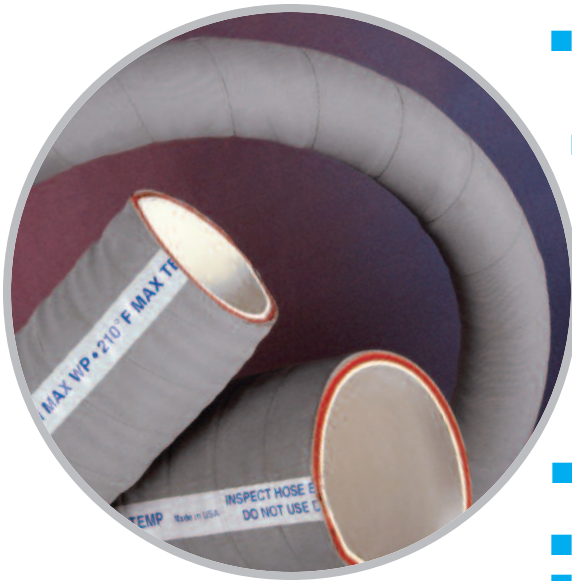

- Ultra smooth, white, nitrile rubber inner surface offers high purity and allows unrestricted flow, minimizing entrapment and blockage concerns
- Microbe-resistant liner is built on stainless steel mandrels for cleanliness and will not impart taste or odor.
 - Meets FDA and Canadian Food Inspection Agency (file: N267) standards
 - Nitrile compound used is free of animal-derived ingredients
 - More flexible than other rubber food and beverage hoses of similar construction
 - Abrasion-resistant nitrile compound cover is lightweight yet durable
- Multi-layered and reinforced with a wire helix, making it ideal for suction applications or discharge applications such as tank cleaning
- Rated for full vacuum (29.9 in./Hg.)
- Odorless and tasteless, making it suitable for a wide variety of food and beverage applications including potable water, non-alcoholic beverages, juices, oily/fatty or dry bulk foods, milk, and dairy products
- Available in bulk quantities or as complete hose assemblies
- Offered in a range of popular sizes
- Clean In Place to 248°F (120°C). Not intended for continuous steam service.
- Offered with standard BPE Stainless Steel Tri-Clamps®, male and female cams, fittings, collars and clamps

Notes

Construction

Liner: White FDA Nitrile rubber
 Reinforcement: Multiple plies of polyester with helix wire
 Wire: Steel helix
 Cover: Gray Nitrile rubber

Fitting Styles Available

- Tri-Clamp®
- Male Cam & Groove
- Female Cam
- Collars
- Hinge Clamps

All recommended fittings, collars, hinge clamps and accessories are made from 300 series stainless steel.

Physical Properties**

Minimum Operating Temp., °F	-40
Maximum Operating Temp., °F	210
Working Pressure at 70 °F (21.1°C)	150 psi
Max Burst Pressure at 70 °F (21.1°C)	600 psi

**Values listed are typical for the material used in manufacture, except where noted, and are meant only as a guide to aid in design. Field testing should be performed to find the actual values for your application.

PART NO.	ID (IN.)	OD (IN.)	VACUUM RATING (IN./Hg.)	BEND RADIUS (IN.)	LBS. PER FT.
NAFB-NW-1000	1	1.54	29.9	4	0.68
NAFB-NW-1500	1-1/2	2.04	29.9	6	0.98
NAFB-NW-2000	2	2.54	29.9	8	1.26
NAFB-NW-2500	2-1/2	3.13	29.9	9	1.76
NAFB-NW-3000	3	3.60	29.9	12	2.06
NAFB-NW-4000	4	4.60	29.9	16	2.73

Hose may be ordered in bulk or as hose assemblies. Maximum continuous length is 100 ft. Specify length (per foot) when ordering.



Made in U.S.A.

NewAge and The "N" Logo are registered trademarks of NewAge® Industries, Inc. • Tri-Clamp® reg TM Alfa Laval Inc.

WARRANTY: NewAge Industries' products are warranted to be free from defects in material and workmanship. Any product found to carry such defects will be replaced without charge. This warranty is limited only to the replacement of NewAge Industries' products, item for item, which after examination by NewAge Industries are deemed defective. NewAge Industries specifically disclaims any other liability. The data supplied is provided as a helpful guideline and is believed to be reliable; however, nothing stated shall constitute a guarantee, recommendation, or warranty for any application.

NOTICE: NewAge Industries, Inc. has been a privately owned corporation since 1954. Neither the corporation nor its principals are affiliated, in any way, with any other group or entity either representing themselves as or being referred to by the term New-Age.

© NewAge Industries, Inc. 2017 Specifications are subject to change without notice.

11/27/17

Your  Distributor



145 James Way
 Southampton, PA 18966

www.foodandbeveragehose.com

800-50-NEWAGE
 (800-506-3924)
 215-526-2300

Fax: 800-837-1856
 215-526-2190

info@newageindustries.com